

F01571

1W VIDEO WAY-FI PLUS 7" KIT

DESCRIPTION

MAIN FEATURES

- Installation with **2 non-polarized wires** .
- **Video camera with high image quality** , even at night.
- **Compatible** with Smart speakers and screens: **ALEXA and GOOGLE HOME** , to receive call notifications on the speaker or smart screen and be able to speak, view the image and use **voice commands to open the door** . With GOOGLE HOME the door opening command only activates the main door.
- **Simple pairing process using QR Code** .
- **Direct opening of the door from your mobile phone** (via optional **security code**), **without the need for auto-on** . Widget or shortcut option.
- **Capture** and view **photos/videos** from the monitor or mobile.
- **Integration with FERMAX Wifi IP cameras ref. 9986** (viewing from monitor and mobile. Motion detection alarms).
- Activation of **additional function F1** from the monitor or the APP.
- **Call from APP to home** (with listening mode option).
- **No user limit in APP** .
- **Management of** several WAY-FI PLUS kits (unlimited **number of installations**) from the same mobile phone.
- **Compatible** with **iOS** version 10 or higher and **ANDROID** version 6 or higher.
- **Intercommunication between monitors** of the same home.
- Door **opening** using **QR codes** .

EXTENSIONS

- 5 additional monitors (6 in total).
- 1 additional outdoor panel (total 2).
- **CAMERAS (ref. 9986)** : up to 4 Wifi IP cameras in total per installation.

TECHNICAL SPECIFICATIONS

THE KIT CONSISTS OF:

- 1573 WAY-FI PLUS 1/L Outdoor panel with Visor: Panel dimensions with visor: 162x94x26 mm
- 1572 WAY-FI PLUS 7" Touchscreen Monitor with Integrated WiFi: Dimensions: 222x154x11.5mm.
- 15701 WAY-FI PLUS Power Supply Din6 29vdc-2a.

OUTDOOR PANEL (Ref 1573):

- Mounting: Surface. Rain visor included necessary for assembly.
- IP/IK Grade: IP 44/IK 07
- Material finish Zamak
- Electric lock release activation: Yes (12 Vdc 250 mA output, terminals S+, S-). Timerable (1-10 s.)
- Potential free relay for activation of 2nd door (garage): Yes. Configurable as Normally Open/Closed. Timerable (1-10 s.)
- Hallway exit button connection: Yes. Activates the electric lock release or relay, selectable and timed (1-20s). Terminals PL,

GND

- Camera: CMOS, HD resolution. Wide angle (H=122º; V=63º). White LEDs (6) for camera lighting with light sensor activation.
- Card holder and button set: Front removable card holder and call button, both with white LED backlighting. Backlight activation by light sensor.
- Possibility of additional panels: Yes, one.
- Speaker volume adjustment: Yes
- Operating temperature: [-25ºC, +70ºC]
- Maximum consumption of electric door opener: 250 mA during maintenance
- Configuration via DIP-switch: Plate number and activation selection of exit button (electric door opener or garage relay)
-

MONITOR (Ref 1572):

- Call Forwarding to Mobile: Unlimited mobile numbers can be paired. Choose whether the call rings simultaneously on the monitor and smartphone or first on the monitor and then on the smartphone (programmable delay time: 5-25s). Call diverting can also be disabled from the monitor.
- Mounting: Surface-mounted (wall connector included).
- Display: 7" capacitive touchscreen (16:9 widescreen format). Resolution: 1024 x 600 pixels. Wide viewing angle (IPS technology). Intuitive user interface compatible with swipe operations.
- LEDs: White: Monitor Activated; Purple: Do Not Disturb Activated; Green: Pending Photos/Videos.
- Conversation Mode: Hands-free.
- Connections for Doorbell: Terminals GND, BELL.
- Connections for Auxiliary Device Activation: Terminals GND, F1.
- Date and Time: Time: 12/24-hour format; Date: configurable format. Can be set manually or synchronized from the internet.
- Do Not Disturb Mode: Immediate and/or timed activation/deactivation for a specific time range during the day.
- Photo Capture: Automatic (deactivated by default) and Manual. Stores up to 200 photos without a Micro SD card, or up to 5,000 with a Micro SD card (depending on SD card size). Photos on the monitor can be copied to the Micro SD card.
- Video Capture: Automatic (deactivated by default) and Manual. Records up to 20 videos without a Micro SD card, or up to 5,000 with a Micro SD card. SD card size: 8-128 GB (not included in the kit). Videos are 15 seconds long.
- Photo and Video Deletion: One by one, multiple selection, or all at once. Older files are deleted when storage limit is reached. Option to format the Micro SD card. Default deletion after 30 days.
- Photo and Video Gallery (with date and time).
- Auto-On: Displays the street view from the monitor, with the option to switch between plates/cameras.
- Pedestrian Door Opening (Electric Door Opener): Activates 12V DC output. Programmable opening time (1-10s). • Garage Door Opening (Electromagnetic Door Opener): Activates a relay. Programmable opening time (1-10s).
- Image Settings: Brightness.
- Call and Conversation Volume Adjustment: Levels from 0 to 8.
- Internal Intercom Function within the Dwelling: Only between monitors (not with smartphones). Option for individual or group calls. Maximum of 6 monitors per dwelling (1 Main and 5 Additional). • Menu Languages: 17.
- Ring Tones: 16. Selectable for plate call, doorbell, intercom call, motion alarm, tamper, and app call.
- Compatibility with Analog CCTV Cameras: No.
- Compatibility with FERMAX IP Wifi CCTV Cameras (Ref. 9986): Supports up to 4 cameras per installation. Not compatible with other camera models.
- Connections: Bus (B, B); Doorbell (GND, BELL); Auxiliary Activation (F1, GND). Micro SD card slot (8-128 GB).
- Menu-Based Configuration, no DIP-switches.
- Firmware Update via SD or OTA (internet).

Nota

Video and photos

Internal memory (without SD card) storage:

- Maximum capacity: 200 photos + 20 videos
  - 100 auto recording photos
  - 100 manually recording photos
  - 10 auto recording videos

- 10 manually recording videos

External memory (SD card) storage:

- Maximum capacity: 5.000 photos + 5.000 videos (depending on the SD size)
  - 100 auto recording photos
  - 4.900 manually recording photos
  - 100 auto recording videos
  - 4.900 manually recording videos

POWER SUPPLY (Ref. 15701):

- Specifications: 100-240V AC, 2.5A (50-60Hz) / 29V DC, 2A. DIN6 rail mounting.

APP-SMARTPHONE:

- App: Free. Compatible with iOS (10.0 or higher) and Android (6.0 or higher).
- Operation: Wi-Fi and/or 3G/4G/5G.
- Maximum Pairings per Installation: 1 administrator and an unlimited number of guests.
- Maximum Installations per Smartphone: Unlimited.
- Auto-On (Street View from the Monitor): Yes.
- Differentiated Opening for Dwelling Door and Garage Door: Yes (via security code).
- Photo Capture and Video Recording: Manual (storage on the smartphone only).
- Viewing Photos and Videos Stored on the Monitor.
- Conversation Mode: Hands-free.
- Microphone Mute and Speaker Silence: Yes.
- Display Mode: Adjustable (25 fps, 10 fps, still image + audio). Full-screen option.
- Call Log: Yes (missed, received, with date and time information).
- Compatible with ALEXA and Google Home.

DISTANCES TABLE

Recommended Cable	Last Panel - Power Supply	Power Supply - Last Monitor
Parallel RVV 0.75 mm² Cable	110 m	110 m
Parallel 2 x 1 mm² Cable (Ref. 5925)	150 m	150 m
CAT5 (using only 2 wires)	35 m	35 m

Technology: WAYFI PLUS

Measures of the product: 164 x 94 x 39 mm

Weight: 1.831 kg

Measures of the packed product: 21x29x11,5 cm

EAN 13: 8424299015712

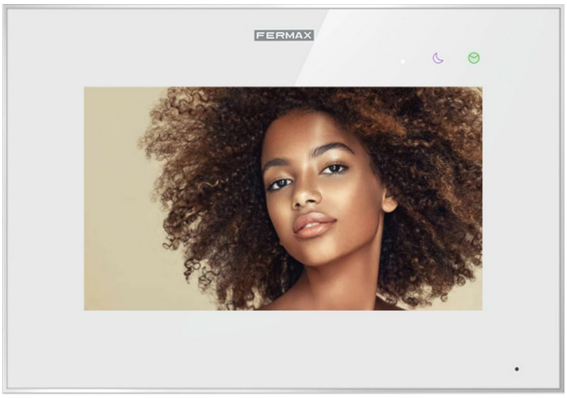

F01572

7" WAY-FI PLUS KIT MONITOR

DESCRIPTION

MAIN FEATURES

- Installation of **2 non-polarized wires** .
- **Compatible** with Smart speakers and screens: **ALEXA and GOOGLE HOME** , to receive call notifications on the speaker or smart screen and be able to speak, view the image and use **voice commands to open the door** . With GOOGLE HOME the door opening command only activates the main door.
- **Simple pairing process using QR Code** .
- **Capture** and view **photos/videos** from the monitor or mobile.
- **Integration with FERMAX Wifi IP cameras ref. 9986** (viewing from monitor and mobile. Motion detection alarms).
- Activation of **additional function F1** from the monitor or the APP.
- **Call from APP to home** (with listening mode option).
- **Intercommunication between monitors** of the same home.

EXTENSIONS

- 5 additional monitors (6 in total).
- **CAMERAS (ref. 9986)** : up to 4 Wifi IP cameras in total per installation.

TECHNICAL SPECIFICATIONS

SISTEMA	
Tecnología	Way-Fi Plus
FEATURES	
Call mode	Hands-free: hands-free call mode
Inductive Loop	No
RTSP CCTV Auxiliary Cameras	4
INSTALLATION	
Wiring	2 non-polarised wires
Mounting	Surface
Connector / Wall conector	Included

ENVIRONMENTAL	
Operating temperature (ºC)	[-10,55]
Non-condensing humidity (%)	[10,90]
Environmental protection rating (IP)	30
MECHANICAL	
Product dimensions (height x width x depth) (mm)	154 x 222 x 11.5
ELECTRICAL	
Minimum consumption (W)	3
Maximum power consumption (W)	9.6
DISPLAY	
Display size	7 "
Touch Screen	Yes. Capacitive
Screen resolution (HxV)	1024 x 600
ADDITIONAL DETAILS	
Weight (kg)	0.5571
Packaging measurements (height x width x depth) cm	3,5x28,4x19,8
EAN	8424299015729

ACCESSORIES



F01570

WAY-FI PLUS P.S.U. DIN8 32VDC-3.5A



F01571

1W VIDEO WAY-FI PLUS 7" KIT



F01573

1W WAY-FI PLUS VIDEO KIT PANEL



F09986

IP AUXILIARY CAMERA WITH WIFI



F01573

1W WAY-FI PLUS VIDEO KIT PANEL

DESCRIPTION

MAIN FEATURES

- Compact **single-family** impact-resistant aluminum panel
- **Surface** mounting. Includes **anti-rain visor** , necessary for installation.
- Management of 2 activations (electric door opener and relay).
- **Video camera with high image quality** , even at night.
- Door **opening** using **QR codes** .
- Illuminated card holder and button with day/night sensor. Scene LEDs too.
- **Tamper** with alarm on monitors and app.

EXTENSIONS

- 1 additional panel (total 2).

TECHNICAL SPECIFICATIONS

SISTEMA	
Tecnología	Way-Fi Plus
INSTALLATION	
Mounting	Surface
ENVIRONMENTAL	
Operating temperature (ºC)	[-25,70]
Environmental protection rating (IP)	44
MECHANICAL	
Impact resistance rating (IK)	7
PUSHBUTTONS	
Card holder backlighting	Yes

ADDITIONAL DETAILS	
Weight (kg)	0.7777
Packaging measurements (height x width x depth) cm	4,9x19,8x10,8
EAN	8424299015736

ACCESSORIES



F01571

1W VIDEO WAY-FI PLUS 7" KIT



F01570

WAY-FI PLUS P.S.U. DIN8 32VDC-3.5A



F01572

7" WAY-FI PLUS KIT MONITOR



F09986

IP AUXILIARY CAMERA WITH WIFI