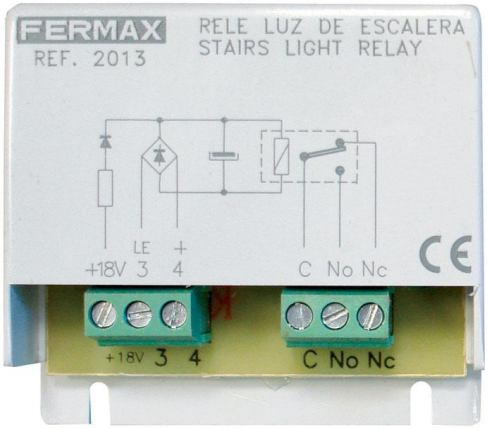

F02013

ADDITIONAL FUNCTIONS RELAY

DESCRIPTION

Small size allows installation in electrical cabinets. Can be flush-fit in standard boxes 10x10 cm. With adhesive strips for fixing, or may be screwed directly onto the wall.Necessary to activate an external device (courtesy light, second door, etc) from the corresponding button (additional button) located in the phone or monitor.

TECHNICAL SPECIFICATIONS

- Maximum operations/second: 20
- Feeding:
  - Terminals “+18V” and “3” = +18 Vdc
  - Terminals “3” and “4” = 8 – 12 Vdc / Vac
- Consumption:
  - Sleep: 0 mA - Active: 70 mA
- Operating temperature:
  - -30ºC +65ºC,
  - RH 90% without condensation
- Dimensions:
  - 61.3 x 68.6 x 20.4 mm (HxWxD)
- Contacts:
  - Maximum switchable voltage:
    - 220 Vac (1 A)
    - 36 Vdc (2 A)
  - Dimensions: 62x70x20 mm ((height-width-depth).

Technology: GENERICA

Weight: 0.055 kg

Measures of the packed product: 6,3x2,4x9 cm

EAN 13: 8424299020136