

F05200

KIT MEMOKEY RESISTANT ONLINE

DESCRIPTION

RESISTANT proximity kits incorporate the identifiers and accessories necessary to install a complete access control solution on a single door.

The kit is delivered ready to operate in standalone mode: simply power it, connect the door opener, and register the identifiers or codes. It supports up to 10,000 users, and the reader itself integrates the controller and opening relay.

Video presentation of the range and comparison of models.

TECHNICAL SPECIFICATIONS

- F04813 POWER DIN6 100-240VAC/12VDC-2A
- F05195 KEYPAD WITH PROX RESISTANT WIFI
- F52750 MIFARE PROXIMITY CARD x3
- F52740 PROX KEY RING MIFARE x2

Technology: NO PE/VP

Weight: 1.06 kg

Measures of the packed product: 7,5x23x17,8 cm

EAN 13: 8424299052007

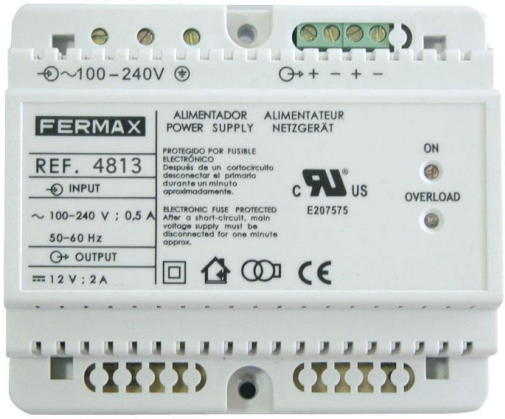

F04813

P.S.U. DIN6 100-240VAC/12VDC-2A

DESCRIPTION

- DIN-6 rail format for easy installation inside an electrical equipment box, or can can be screwed directly onto the wall.
- Used to power the different equipment in a Fermax installation.
- Constructed in self-extinguishing VO material.
- Includes a set of covers to protect the connection terminals.

TECHNICAL SPECIFICATIONS

Input frequency: 50-60Hz
It has two operating indicator LEDs:

- LED ON on: indicates that the feeder is in operation.
- OVERLOAD LED on: indicates maximum current exceeded (it will be necessary to reduce the load of the installation or add additional feeder(s).
- ON+OVERLOAD LED flashing: indicates short circuit.

Technology: GENERICA

Weight: 0.326 kg

Measures of the packed product: 6,5x11,3x9,6 cm

EAN 13: 8424299048130



F52750

PROXIMITY CARD MIFARE FERMAX

DESCRIPTION

- 1K RFID MIFARE to 13,56Mhz. This device serves for user's authentication.
- Each device has an identification to add it in the system manually.
- It does not require any maintenance or batteries.

Technology: NO PE/VP

Measures of the product: 85(H)x54(V)x1(P) mm

Weight: 0.005 kg

Measures of the packed product: 0,1x8,5x5,5 cm

EAN 13: 8424299527505

ACCESSORIES

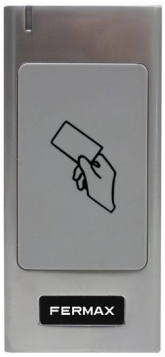

F05296

RESISTANT PROX. READER WG



F06958

CITYLINE WG MIFARE/EM PROXIMITY READER



F07461

SKYLINE WG MIFARE/EM PROXIMITY READER V



F05293

KEYPAD W/PROXIMITY RESISTANT



F52740

PROXIMITY KEYRING FERMAX MIFARE

DESCRIPTION

- 1K RFID MIFARE proximity keyring to 13,56Mhz.
- It serves as user's authentication device.
- Each device has an identification to added it in the system manually.
- It does not require any maintenance or batteries.

Technology: NO PE/VP

Measures of the product: 25x52 mm

Weight: 0.004 kg

Measures of the packed product: 0,4x4x3,2 cm

EAN 13: 8424299527406

ACCESSORIES



F05296

RESISTANT PROX. READER WG



F07461

SKYLINE WG MIFARE/EM PROXIMITY READER V



F05293

KEYPAD W/PROXIMITY RESISTANT



F05195

RESISTANT WIFI KEYPAD W/PROXIMITY

DESCRIPTION

Vandal-resistant keyboard with integrated proximity sensor, featuring a slim profile and compact dimensions. It allows for standalone or centralized operation.

Additionally, the device has a Wi-Fi connection for access management and monitoring.

STANDALONE MODE WITH INTEGRATED CONTROLLER (default)

Maximum capacity of up to 1,000 users.

This keyboard allows up to 5 different types of access:

- Card only
- Card+PIN.
- Card or PIN (default).
- Multi-card, PIN.
- Open from the Tuya app.

STANDALONE MODE WITH EXTERNAL CONTROLLER

If additional user capacity is required or to secure the installation, it is possible to configure the keyboard as wiegand26 and connect it to a standalone MINI controller ref. 5193.

CENTRALIZED MODE

To access the user database on a PC or to grant access to more than 1,000 people, this keypad can be configured with Wiegand 26/8-bit burst mode for installation in a centralized system such as AC-MAX, AC+, or IP-AXES. This allows you to maintain a log of entries and exits, including time, user, and access details. This type of installation requires adding an external controller to the reader. This controller is managed by a PC and provides access to the user database, as well as real-time or offline viewing of the event log.

TECHNICAL SPECIFICATIONS

INSTALLATION	
Mounting	Surface

ENVIRONMENTAL	
Operating temperature (ºC)	[-40,60]
Non-condensing humidity (%)	[0,98]
Environmental protection rating (IP)	66
MECHANICAL	
Product dimensions (height x width x depth) (mm)	135 x 55 x 25
Impact resistance rating (IK)	9
ELECTRICAL	
Minimum consumption (W)	0.72
Maximum power consumption (W)	1.8
Relay current capacity (A)	2
GENERAL ACCESS CONTROL FEATURES	
Integrated/external controller	Yes
PROXIMITY READER FEATURES	
Reading distance (cm)	2 - 6
Maximum number of identifiers	10000
KEYBOARD FEATURES	
Number of codes	10000
Length of codes	6
Keyboard backlighting	No
FUNCTIONS	
Add temporary users	
Alarm for excessive failed attempts	
Automatic collection mode	When Auto-collection mode is enabled, all cards can open the door. At the same time as the door is released, the user is added to the list of authorised cards.
Cloning function	
Open door sensor	
ADDITIONAL DETAILS	
Weight (kg)	0.55
Packaging measurements (height x width x depth) cm	6,5x14,7x7,5
EAN	8424299051956