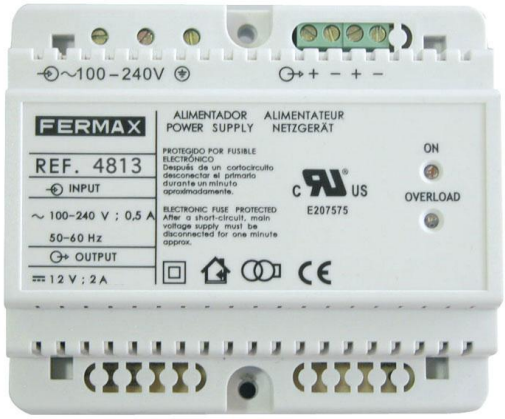

F04813

P.S.U. DIN6 100-240VAC/12VDC-2A

DESCRIPTION

- DIN-6 rail format for easy installation inside an electrical equipment box, or can can be screwed directly onto the wall.
- Used to power the different equipment in a Fermax installation.
- Constructed in self-extinguishing VO material.
- Includes a set of covers to protect the connection terminals.

TECHNICAL SPECIFICATIONS

Input frequency: 50-60Hz
It has two operating indicator LEDs:

- LED ON on: indicates that the feeder is in operation.
- OVERLOAD LED on: indicates maximum current exceeded (it will be necessary to reduce the load of the installation or add additional feeder(s).
- ON+OVERLOAD LED flashing: indicates short circuit.

Technology: GENERICA

Weight: 0.326 kg

Measures of the packed product: 6,5x11,3x9,6 cm

EAN 13: 8424299048130