



F01508

1W MEET VIDEO NEO WHITE KIT

DESCRIPTION

NEO MEET VIDEO KIT for single-family homes, offices and businesses. MEET IP video door entry system. Decentralized SIP P2P protocol. Direct connection of devices to the building network infrastructure.

- NEO monitor with 7" capacitive touch screen and hands-free audio. Surface installation using 95411 connector.
- Doorbell function. Photos of missed calls. Visualization of IP cameras.
- MILO 1L IP54 panel with 1.2MPx color camera. Installation in embedding box 9543.
- Call diverting to up to 8 devices with MEET ME APP as standard. Licenses included. Pairing of users' mobile devices through a label on the front of the monitor. Receiving calls even when the APP is closed.
- Expandable to a maximum of 8 panels and 8 monitors. Possibility of intercommunication between monitors (autodiscovery of monitors).
- SIP-compliant. Integrable with third-party VoIP terminals and PBXs.
- Panel RTSP streaming for image recording from a third-party video recorder.
- Reconfiguration of devices via web browser, without additional software.

TECHNICAL SPECIFICATIONS

Supply:

- Switch: max.30W/port (IEEE802.3af/at), up to 48W in total
- Devices: PoE
- Use an additional power supply for the electric lock release.

Summary:

- MILO 1L: Lens 52°(V), 100°(H), 0.5Lux min., white led
- NEO monitor: 7", 800x480px, 8 sensor inputs
- Audio/video codecs: G.711, H.264
- RJ-45 Ethernet connection

Technology: MEET

Measures of the product: 320x227x245 mm

Weight: 3.277 kg

Measures of the packed product: 22,4x32,5x24,7 cm

EAN 13: 8424299015088



F14501

NEO 7" MONITOR POE WHITE MEET

DESCRIPTION

NEO is a capacitive touch screen monitor available in 7” and white color. NEO graphical interface provides an intuitive user experience since it is design focused on a residential intercom use.

FEATURES

- 7” Capacitive Touch Screen
- Hands Free Audio Communication
- Apartment internal intercom
- Apartment to apartment external intercom
- IP CCTV visualization (up to 8)
- Panel Aux IP CCTV camera visualization and aux relay operation during call (up to 4)
- MEET ME Call divert function
- Doorbell connection
- Relay activation (up to 8 using Ref.1616 relay module)
- Calls Automatic Picture Capture
- Do not disturb
- Different ringtones depending on call source
- Integrated 7 zones alarm + tamper
- Lift control
- Available in 12 languages (English, Spanish, German, Polish, French, Chinese, Russian, Turkish, Hebrew, Farsi, Portuguese & Vietnamese)
- Remote reset and factory settings
- SIP compatible

FUNCTIONS

1. CONCIERGE. Users can call the desired concierge by selecting it on the list shown in the user interface. If the concierge has a camera attached a video communication will be stablished, otherwise only audio.

2. PANEL AND CCTV CAMERA AUTO ON. Users can open the panel’s video channel of their respective block for surveillance purpose. Once the panel communication is established, the user can talk and open the door if wanted.

There is also possible to supervise the authorized CCTV cameras.

3. AUX CAMERA AND AUX DOOR LOCK RELEASE DURING CONVERSATION. When a call is received from the panel, it is possible to display different aux cameras (up to 4) to get a different angle of view or to follow the visitor. At the same time different aux relays (up to 4) can be activated to open additional gates or barriers.
4. DOORBELL. It is possible to connect a pushbutton to the monitor so it will trigger the doorbell sound on the monitor.
5. INTERCOM CALL. The monitor allows the users to call different monitors in the same apartment (internal intercom).
6. EXTERCOM CALL, The monitor allows to call different monitors in different apartments (extercom) within the same community.
7. CALL LOG. Users can have a clear view of their call history in the CALL LOG interface and are able to browse through the pictures taken for each call. There is possible an individual or a complete deleting of the registers.

8. PHOTO CAPTURE. When receiving a call, it is possible to capture automatically a photo.
9. MESSAGES. Users can receive text messages from their property management so they can easily know if there is a package, a maintenance schedule or an import event on their community (software management required). Maximum 64 messages.
10. LIFT CONTROL. Tenants can enable the lift to their visitors to access their floor at the same time the panel door lock is opened from the monitor. Tenants can call the lift before leaving their apartment, so the lift car is ready on the floor.
11. ALARMS. The monitor provides 7 alarm zones management, managed under 3 simple modes:

HOME: Lowest Security level. SLEEP: Medium Security level. OUT: Highest Security level.

12. SOS. User generates an SOS alarm by touching this icon several seconds, sending a message to the concierge and management software.
13. DO NOT DISTURB. It is possible to set the monitor to DO NOT DISTURB mode, so the calls will not produce any sound during a defined period of time. Do not disturb led will light up if this function is active.
14. RELAY ACTIVATION. It is possible to active up to 8 using Ref.1616 relay module

TECHNICAL SPECIFICATIONS

SYSTEM	
Conversation privacy	Yes
FEATURES	
Call mode	Hands-free: hands-free call mode
Web server	Yes
Sip Compatibility	Yes
RTSP CCTV Auxiliary Cameras	8
ENVIRONMENTAL	
Operating temperature (ºC)	[-10,55]
Non-condensing humidity (%)	[20,95]
Environmental protection rating (IP)	30
MECHANICAL	
Product dimensions (height x width x depth) (mm)	129 x 203 x 17.5
ELECTRICAL	
Minimum consumption (W)	2.4
Maximum power consumption (W)	6
DISPLAY	
Display size	7 "
Touch Screen	Yes. Capacitive
Screen resolution (HxV)	800 x 480

AUDIO	
Audio codec	G.711
VIDEO	
Video codec	H.264
ADDITIONAL DETAILS	
Weight (kg)	0.625
Packaging measurements (height x width x depth) cm	6,8x31x21,5
EAN	8424299145013

ACCESSORIES



F01616

FERMAX MEET RELAY DECODER 10 OUTPUTS



F09533

1/W MILO VIDEO PANEL MEET

DESCRIPTION

1L MEET VIDEO CARD PoE without proximity reader.

SPECIFICATIONS

- Aluminum profile
- Tempered glass
- High definition color camera
- Low consumption
- Extended operating range
- Modular Linux-based platform
- Remote Firmware Update

FUNCTIONS

- CALL TO APARTMENT Visitors can call the apartment associated with the plate.
- CALL TO CONCIERGE It is possible to make calls for assistance to the concierge associated with the panel.

REFERENCES

- Ref. 9533 1L MEET VIDEO CARD
- Ref. 9534 1L MEET VIDEO CARD (+ PROXIMITY READER)
- Ref. 9543 FLUSH BOX – S MEET
- Not compatible with Elevator Control function

TECHNICAL SPECIFICATIONS

SYSTEM	
Conversation privacy	Yes
FEATURES	
CPU	ARM Cortex-A7 1.2GHz
FLASH	128M
SDRAM	64MB
Web server	Yes

Sip Compatibility	Yes
INSTALLATION	
Mounting	Flush,Surface
ENVIRONMENTAL	
Operating temperature (ºC)	[-25,70]
Non-condensing humidity (%)	[10,90]
Environmental protection rating (IP)	54
MECHANICAL	
Product dimensions (height x width x depth) (mm)	183 x 118 x 49
Product Color	Aluminium
Pushbutton material and finish	Stainless steel
Modularity	No
Calling method	Pushbutton
Tickets	1
Departures	1
RJ45	1
Tamper	Yes
ELECTRICAL	
Minimum consumption (W)	1.5
Maximum power consumption (W)	3
AUDIO	
Communication type	Full Duplex
Audio codec	G.711 codec
VIDEO	
Video viewing angles (H x V x D)	52 x 100 x 120
Color night vision through white LEDs	Yes
KEYBOARD	
Keyboard backlighting	No
KEYBOARD FEATURES	
Keyboard backlighting	No
ADDITIONAL DETAILS	
Weight (kg)	0.7976

Packaging measurements (height x width x depth) cm	8x25,5x16,5
EAN	8424299095332

NOTES

Using the panel together with other accessories may affect and reduce its IP and IK protection ratings. It is recommended to seal the entire assembly after installation.

ACCESSORIES



F09543

1/W MILO PANEL FLUSH BOX MEET



F01586

SWITCH POE 4 PORTS

DESCRIPTION

- This switch complies with the IEEE 802.3af/at standard.
- Automatic detection of any devices powered in the standard is enabled at the 1 – 4 ports of the switch. The UP LINK ports are used for connection of another network.
- The LEDs at the front panel indicate the operation status.
- The PoE technology ensures a network connection and reduces installation costs by eliminating the need to supply a separate power cable for each device. This method allows supplying other network devices, such as IP phone, wireless access point or router.

TECHNICAL SPECIFICATIONS

Includes 220 Vac power adapter

- 4 PoE 10/100Mb/s ports (data and power transmission)
- 2 10/100Mb/s ports (UP LINK)
- Allows cable lengths of up to 100m.
- 30W for each PoE port, for devices that comply with the IEEE802.3af/at (PoE+) standard
- Supports auto-learning and auto-aging of MAC addresses (1K)
- Includes additional installation elements

Ports	6 10/100Mb/s ports (4 x PoE + 2 x UP LINK) with connection speed auto-negotiation and MDI/MDIX Auto Cross
PoE power supply	IEEE 802.3af/at (1÷4 ports), 52 V DC / 30 W at each port *
Protocols	IEEE802.3, 802.3u, 802.3x CSMA/CD, TCP/IP
Bandwidth	1,6Gbps
Transmission method	Store-and-Forward
Optical indication of operation	Switch power supply Link/Act PoE status
Power supply	~100-240 V; 50/60 Hz; 1,3 A / 52 VDC; 1,15 A external power supply is included.
Operating conditions	Temperature -10ºC ÷ 40ºC, Relative humidity 5% - 90%, no condensation
Dimensions	W=118, H=28, D=85 [+/- 2mm]
Net/gross weight	0,5/0,7kg
Protection class	EN 60950-1:2007
Storage temperature	-20ºC ÷ 60ºC

* The given value of 30 W per port is the maximum value. The total power consumption should not exceed 48 W.

APPLICATION

This switch can supply up to 4 MEET devices. These devices can be either KIN PANELS or WIT MONITORS. Just connect each device to the one of the 4 PoE ports of the switch by means of an Ethernet cable.

Furthermore, these devices can also be a MILO PANEL, a MIO MONITOR or a MILO GUARD UNIT. A PoE Splitter Ref. 1498 is required in this case.

The two UP LINK ports can be used to connect another switch.

Accessories included:

- Power supply
- Brackets for rack mounting

Technology: MEET

Measures of the product: 118 X 28 X 85 mm

Weight: 0.783 kg

Measures of the packed product: 8,7x25,2x20,6 cm

EAN 13: 8424299015866

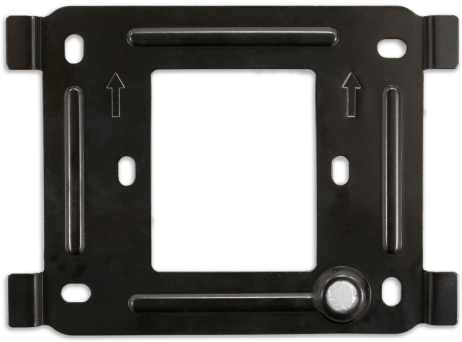

F95411

NEO/WIT MONITOR CONNECTOR MEET

DESCRIPTION

- Mounting support for the NEO/WIT monitor in the wall.
- Includes monitor connection cables. MEET System.

TECHNICAL SPECIFICATIONS

- Mounting support for the NEO/WIT monitor in the wall.
- Includes monitor connection cables. MEET System.

Technology: MEET

Weight: 0.081 kg

Measures of the packed product: 9,2x0,8x12,5 cm

EAN 13: 8424299954110



F09543

1/W MILO PANEL FLUSH BOX MEET

DESCRIPTION

Recessed box for MILO 1L MEET plate. To install a street panel it is necessary to place a box on the wall where we will later fix the panel.

Technology: MEET

Measures of the product: 172,5 x 105 x 63 mm

Weight: 0.485 kg

Measures of the packed product: 17x10,5x6,5 cm

EAN 13: 8424299095431